

Diamond Disc Assortment

The right discs for every application

MEISINGER diamond discs are suitable for precise cutting and separation. Whether plastic, ceramics, zirconia or plaster - the comprehensive assortment contains the right discs for every material.

Together they all have a tendency to perfection: a precise diamond coating, very long service life and vibration-free work characterize the diamond discs. Almost all instruments are available in different diameters.



At a glance

- Safe application
- Precise diamond coating

- Long service life
- Vibration-free working

Our sales force would be pleased to answer your questions: +49 2131 2012-303

Meisinger since 1888

943DC extra fine




Fig.	Shank	Ref.-No.		1	1
			L mm	0,15	0,15
943DC	HP	806 104 361 504		080	100




365D fine



Fig.	Shank	Ref.-No.		1	1
			L mm	0,3	0,35
365D	HP	806 104 333 514		300	450*



910D medium

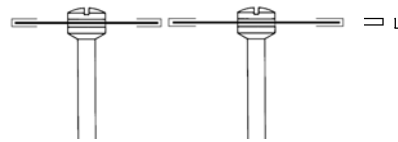

Shank	Ref.-No.		1	1
		L mm	0,5	0,5
910D	HP	806 104 321 524	190	220
	unmounted	806 900 321 524	190	220



911D medium

911DF fine




Fig.	Shank	Ref.-No.		1
			L mm	0,5
911D	HP	806 104 332 524		220*
	unmounted	806 900 332 524		220*
			L mm	0,45
911DF	HP	806 104 332 514		220
	unmounted	806 900 332 514		220



915D medium

915DF fine
915DC extra fine

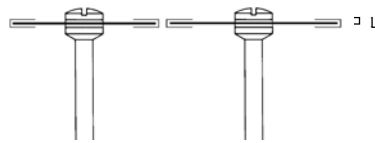


Fig.	Shank	Ref.-No.		1	1
			L mm	0,25	0,25
915D	HP	806 104 355 524		190*	220*
	unmounted	806 900 355 524		190*	220*
			L mm	0,2	0,2
915DF	HP	806 104 355 514		190	220
			L mm	0,15	0,15
915DC	HP	806 104 355 504		190	220



916D medium

916DH super coarse
916DG coarse
916DF fine

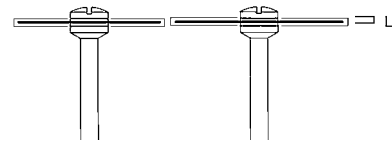


Fig.	Shank	Ref.-No.		1	1
			L mm	0,5	0,5
916D	HP	806 104 327 524		190	220
	unmounted	806 900 327 524		190	220



Fig.	Shank	Ref.-No.		1
			L mm	0,5
918D	HP	806 104 335 524		220
	unmounted	806 900 335 524		220

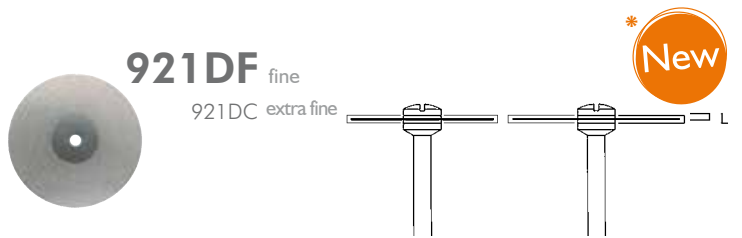


Fig.	Shank	Ref.-No.		1	1
			L mm		0,2
921DF	HP	806 104 358 514		220*	
	unmounted	806 900 358 514		220*	
			L mm	0,15	0,15
921DC	HP	806 104 358 504		190	220
	unmounted	806 900 358 504		190	220

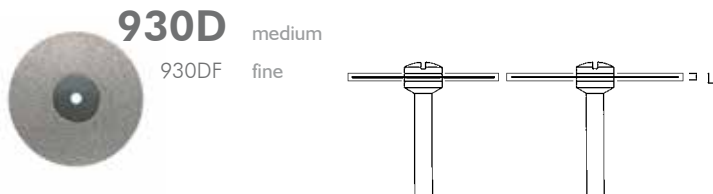


Fig.	Shank	Ref.-No.		1	1
			L mm	0,3	0,3
930D	HP	806 104 345 524		220	
	unmounted	806 900 345 524		220	
			L mm	0,25	0,25
930DF	HP	806 104 345 514		190	220
	unmounted	806 900 345 514		190	220

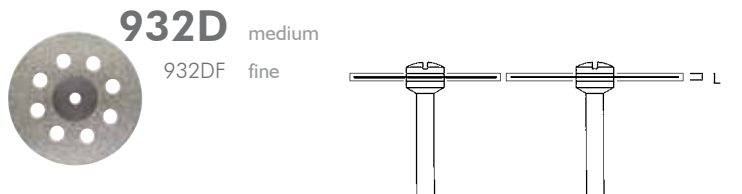


Fig.	Shank	Ref.-No.		1	1
			L mm	0,3	0,3
932D	HP	806 104 350 524		220	
	unmounted	806 900 350 524		220	
			L mm	0,25	0,25
932DF	HP	806 104 350 514		190	220
	unmounted	806 900 350 514		190	220

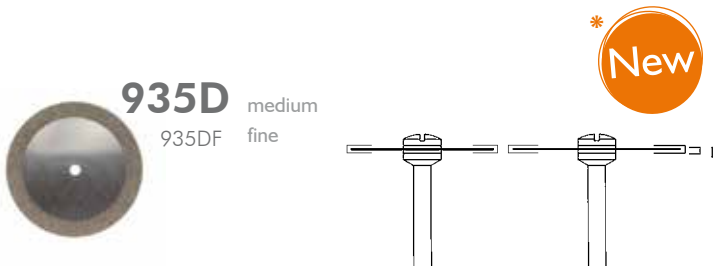


Fig.	Shank	Ref.-No.		1	1
			L mm	0,3	0,3
935D	HP	806 104 340 524		220*	
	unmounted	806 900 340 524		220*	
935DF	HP	806 104 340 514		190	220
	unmounted	806 900 340 514		190	220

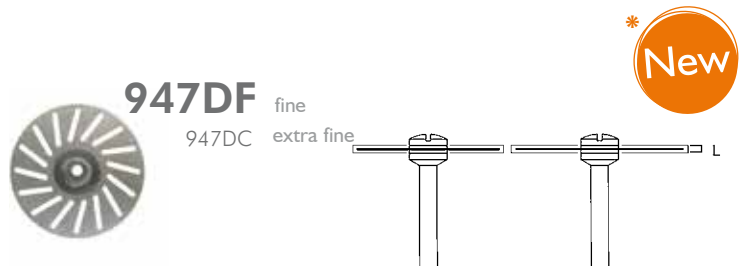


Fig.	Shank	Ref.-No.		1	1
			L mm	0,2	0,2
947DF	HP	806 104 389 514		190	220
	unmounted	806 900 389 514		190	220
			L mm		0,15
947DC	HP	806 104 389 504		220*	
	unmounted	806 900 389 504		220*	

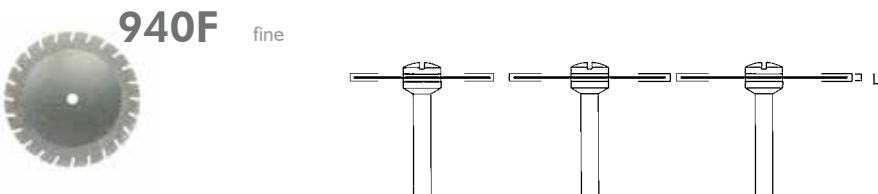


Fig.	Shank	Ref.-No.		1	1	1
			L mm	0,2	0,2	0,2
940F	HP	806 104 377 514		180	200	220
	unmounted	806 900 377 514		180	200	



Fig.	Shank	Ref.-No.		1
			L mm	0,15
401DF	HP	806 104 400 514		220
	unmounted	806 900 400 514		220

Recommended use: Diamond Discs

Figure	Diamond Disc			Remove plastic	Seperate plastic	Remove ceramic	Seperate ceramic	Zirconia	Plaster
	L	Ø	Handling						
910D	0,5	190 220	rigid			✓		✓	
911D	0,5	220	rigid	✓		✓		✓	
	0,45	220						✓	
915D	0,25	190 220	super flexible		✓		✓		
	0,2	190 220							
	0,15	190 220							
916D	0,5	190 220	rigid			✓			
918D	0,5	220	rigid	✓		✓			
921D	0,2	220	super flexible		✓		✓		
	0,15	190 220							
930D	0,3	220	flexible		✓		✓	✓	
	0,25	190 220							
932D	0,3	220	flexible	✓	✓		✓	✓	
	0,25	190 220						✓	
935D	0,3	220	flexible	✓	✓	✓	✓	✓	
	0,3	190 220							
940F	0,2	180 200 220	super flexible		✓		✓		✓
943D	0,15	080 100	super flexible		✓		✓		
947D	0,2	190 220	super flexible		✓		✓		
	0,15	220							
401D	0,15	220	flexible		✓		✓		
365D	0,3	300	flexible						✓
	0,35	450							

✓ = particularly suitable ✓ = suitable